

Package crosscut saw Vario-Cut with moveable carriage and stationary saw unit. The packages are positioned by means of an electrically controlled carriage. During the cutting process the guide bar can be guided through the package in an angle of 0-15°. The cutting of partial packages is possible on any package height. By means of the parallelogram set-off device the cutting kerf can be opened - condition for optimally carrying out multiple cuts within one package.



Variable cutting angle of 0 to 15° for optimal distribution of the cutting forces



Available with several control options



Sharpening unit included in the scope of supply




Available with integrated waste conveyor

The Vario-Cut series is especially designed for the needs of high-capacity operations. A rugged saw unit, a vertically running guidance of the guide bar and the possibility of the variable guide bar control during the cutting process characterize this machine type. Equipped with 15-kW drive for short cycle times during cutting process and high capacity.

- Maximum cutting accuracy by cutting assembly guided on both sides
- Electric positioning
- Hydraulic saw feed, continuously adjustable
- System lengths up to 10 m
- Guide bar length 160 cm
- Maximum package cross section 1,2 m x 1,2 m
- Saw drive 15 kW


## Additional equipment


- Automatic cutting sequence by control of the cutting process
- Integrated waste evacuation
- Cutting depth adjustment

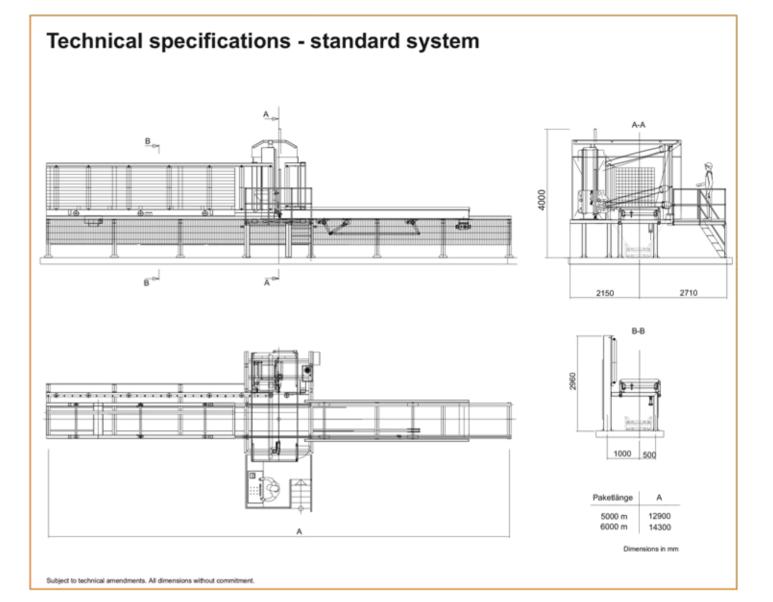

## **HOLTEC** cutting assembly = highest quality

- Guide bar completely stellite armoured and 4-fold turnable
- Equipped with original STIHL-chain with patented Oilomatic principle
- **STIHL**-lubrication oil for a long lifetime of chain, guide bar
- Everything from one source -Machine, cutting assembly and service
- HOLTEC sharpening service for best cutting results and long lifetimes





3 Available with hardchromed or carbide tipped STIHL-scratcher

