



CE-conform protection devices



Universal sharpening unit included in the sope of supply




Smooth cutting surfaces


The ES 121 FSHK is the simplest solution for precise end trimming also of unedged timber and of timber packages which are stacked with gaps. By means of the moveable saw the packages remain in their loaded position and are cut to length with highest precision. These systems are also perfect for customers with limited space.


More than 8000 delivered systems worldwide prove: HOLTEC package crosscut stations meet every Requirement.

- Maximum cutting accuracy and ideal distribution of the cutting forces.
- Safe and easy operation
- Optional with manual or electrical positioning
- Hydraulical saw feed, continuously adjustable
- Maximum package length 6 m
- Guide bar length up to 250 cm
- Maximum package cross section > 1,2 x 1,2 m
- Saw drive 11 kW 400V/50Hz
- Additional equipment
- Electronic length indication or position control
- Electric positioning
- Integrated waste conveyor

## Technical specifications - standard system

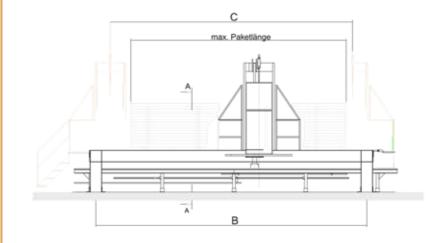



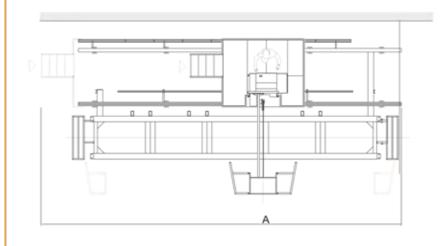



max. Package length	Α	В	С
4000	8040	5550	4750
5000	9040	6550	5750
6000	10040	7550	6750

Subject to technical amendments. All dimensions without commitment

## HOLTEC cutting assembly = highest quality

- Guide bar completely stellite armoured and 4-fold turnable
- Equipped with original STIHL-chain with patented Oilomatic principle
- **STIHL**-lubrication oil for a long lifetime of chain, guide bar
- Everything from one source -Machine, cutting assembly and service
- HOLTEC sharpening service for best cutting results and long lifetimes





 Available with hardchromed or carbide tipped STIHL-scratcher



